

BSW

Slide Switch For Brush Or Brushless Motor System




Small slide dust protected DC switch with one normally closed contact and one normally opened contact. The normally closed contact is suitable for signal contact to activate remote electronic, while the normally opened contact has a higher rating up to 25.1A 24Vdc and is suitable for switching the motor current.



-Features

- Small footprint
- Added double throw
- Dust protected

Models	Configuration	Approvals	
BSW	SPDT	25.1A 12/14.4/16/18/20.4/24Vdc, 5E4(NO) 1A 12/14.4/16/18/20.4/24Vdc, 5EC (NC)	25.1A 12/14.4/16/18/20.4/24Vdc, 5E4 (NO) 1A 12/14.4/16/18/20.4/24Vdc, 5EC (NC)
BSW	DPST	25.1A 12/14.4/16/18/20.4/24Vdc, 5E4	-

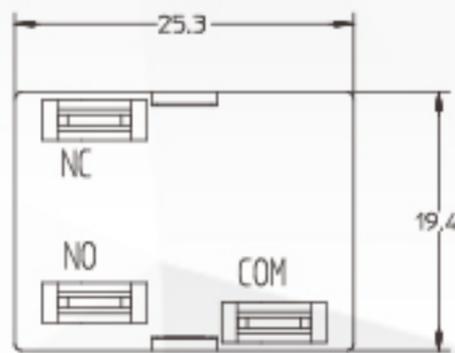

CIRCUIT SCHEMATICS

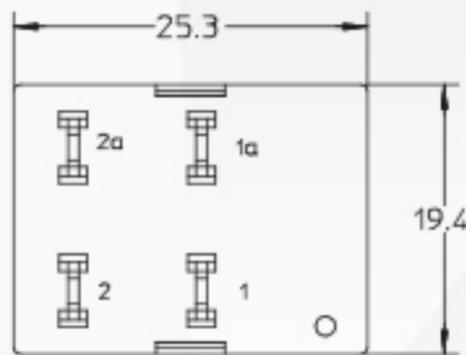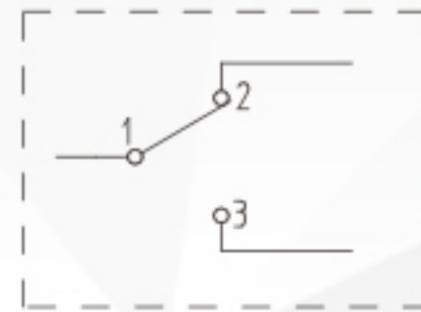

CIRCUIT SCHEMATICS

