



DMY Series

Normal Closed Miniature Micro Switch


Features

- Compact structure
- High sensitivity and short traveling distance
- Long lifespan

Specifications

- UL61058 : 16.1GP/16.1RA/15GP/15RA 125VAC T85 μ 10000 cycles IP30
- UL1054 : 15A 125VAC, 10A 250VAC T105 6000 cycles
- ENEC/CQC : 10A 250VAC T85 μ 10000 cycles
- Insulation resistance : $\geq 50M\Omega$
- Contact resistance : $\leq 50m\Omega$

Typical applications

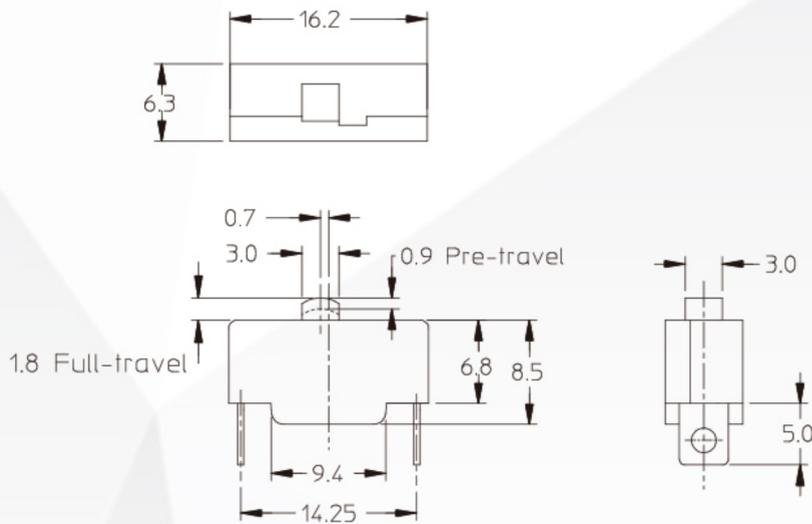

DMY

Circuit	Housing	Knob	Terminal	Operation force
- X -	X	X	X	X X - XXX
S Momentary off 	A 	A 	A B P S 	A 250~450gf

Matrix Guide

					Terminal Type	Certification		
	Voltage	Current	Number of Throws	IP Class	Soldering	UL1054	ENEC	CQC
NC								
DMY-1115-S-AAA31-01R	125VAC, 250VAC	10A, 15A	1	IP00	✓	✓	✓	
DMY-1115-S-AAS31-01R								
DMY-1115-S-AAP31-01R								
DMY-1115-S-AAA31-02R								✓