

DSJ Series

Multi-Positions Slide Switch

Features

- Variety of terminals and knob shapes
- Multi-circuits and positions options


Specifications

- UL1054 : 16A 125VAC(N.I.), 8A 250VAC T65 6000 cycles;
13A 125VAC(N.I.), 6.5A 250VAC(N.I.) T65 6000 cycles;
11A 125VAC(N.I.), 5.5A 250VAC(N.I.) T105/T65 6000 cycles;
0.5A 125VDC T105/T65 6000 cycles;
- 11A 22VDC T65 6000 cycles;
- 6A 125VAC(N.I.) T65 6000 cycles;
- 6A 125VAC T65 10000 cycles;
- 4A/2A 14VT T65 12000 cycles

- Insulation resistance : $\geq 50M\Omega$
- Contact resistance : $\leq 50m\Omega$

Typical applications

| Kitchenware appliances | | Beautycare appliances |
|------------------------|----------------------|-----------------------|
| | | |
| Juicer | Meat grinder machine | Hair dryer |

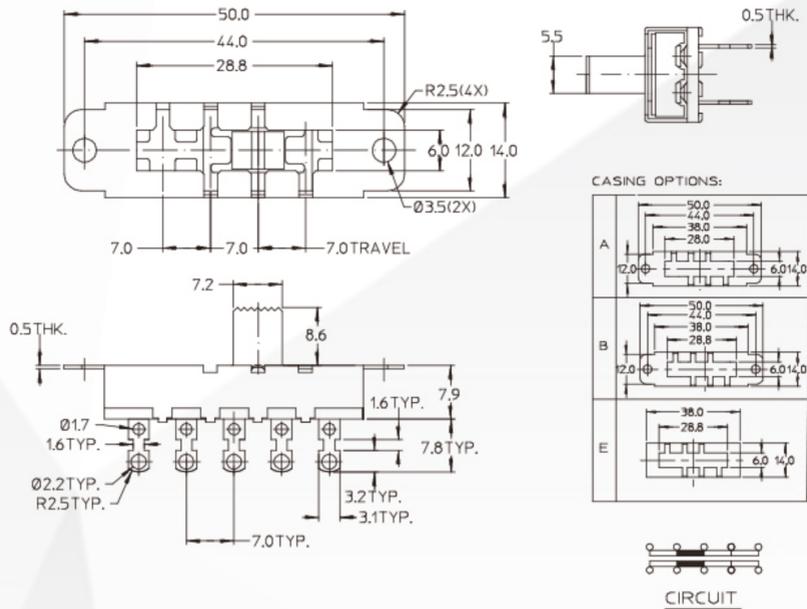

DSJ

DSJ KNOB OPTIONS (FOR LONG SLOT "L" SL0007)

| A | B | C | F | G | H | N | Q | R | T | U |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | |
| | | | | | | | | | | |

DSJ KNOB OPTIONS (FOR SHORT SLOT "S" SL0008)

| D | E | J | L | M | P | S |
|---|---|---|---|---|---|---|
| | | | | | | |

TERMINAL OPTIONS

| A | B | C | D | G | J | K | L |
|---|---|---|---|---|---|----------|---|
| | | | | | | | |
| M | N | P | S | U | X | (Twin) | |
| | | | | | | | |

Matrix Guide

|  | | | | Terminal Type | | Certification | |
|-----------------------------------------------------------------------------------|----------------|---------------|------------------|---------------|-----------|---------------|-----|
| | Voltage | Current | Number of Throws | Quick Connect | Soldering | UL1054 | CSA |
| ON-ON | | | | | | | |
| DSJ-2413-0-XX-31 | 125VAC, 250VAC | 13A, 6A, 0.5A | 4 | ✓ | | ✓ | ✓ |
| NC.+NO. | | | | | | | |
| DSJ-2416-BDM11-01R | 125VAC, 125VDC | 16A, 8A | 4 | | ✓ | ✓ | ✓ |
| DSJ-2416-1-ML-30 | 125VAC, 250VAC | 16A, 8A | | | | | |