



# DSQ Series

## Single Pole Slide Switch

### Features


- Variety of terminals and knob shapes
- Single pole with momentary ON circuit available

### Specifications

- UL1054 : 3A 125VAC T80 6000 cycles;  
0.5A 125VDC T80 6000 cycles
- Insulation resistance :  $\geq 50M\Omega$
- Contact resistance :  $\leq 50m\Omega$




### Typical applications

Kitchenware appliances	Beautycare appliances	Tooling and machinery equipment
Blender	Egg beater	Hair straightener
		Electric screwdriver

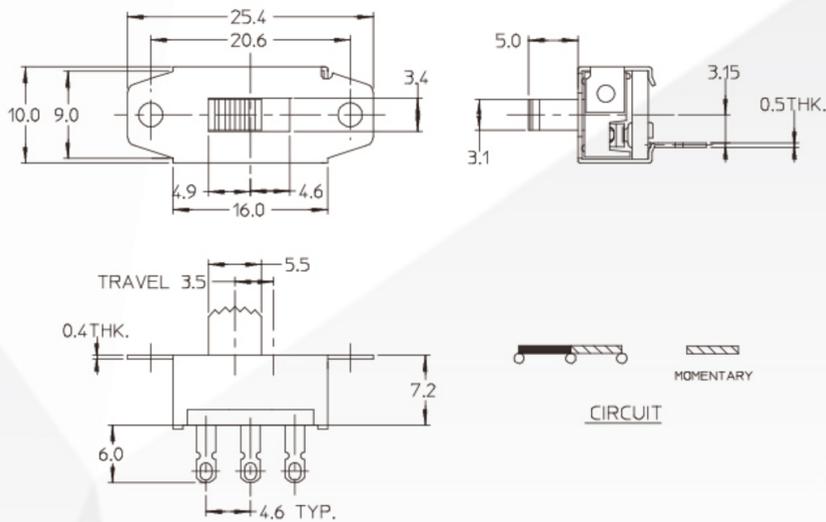

### DSQ-XXXX

Casing	Knob	Terminal	Operation force
- <b>X</b>	<b>X</b>	<b>X</b>	<b>X X - XXX</b>

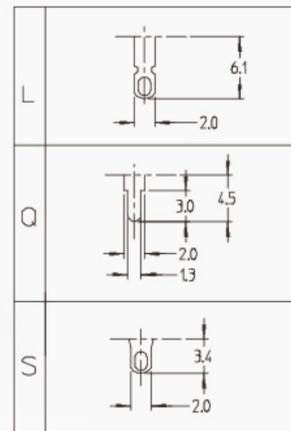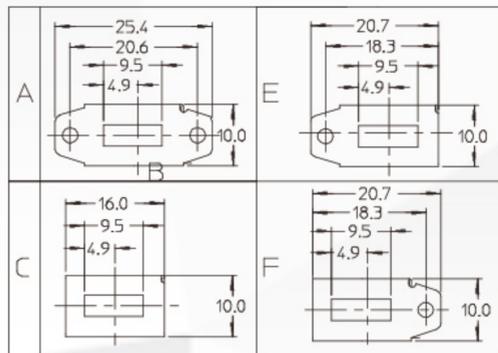

850±160gf.

### Matrix Guide

				Terminal Type	Certification
	Voltage	Current	Number of Throws	Soldering	UL1054
<b>NC.+NO.</b>					
DSQ-1203-R-AAS11-03R	125VAC, 125VDC	3A, 0.5A	2	✓	✓
DSQ-1203-R-CAL12-01R					
DSQ-1203-R-CAL01-01R					
<b>Momentary ON</b>					
DSQ-1203-R-AAQ11-01R	125VAC, 125VDC	3A, 0.5A	2	✓	✓
DSQ-1203-R-FAL01-01R					
DSQ-1203-R-CAS11-01R					